


EcoStretchRoll

HIGH-PERFORMANCE SPREADER ROLL

Independent spreading action across the entire roll face for consistent performance at high speeds.

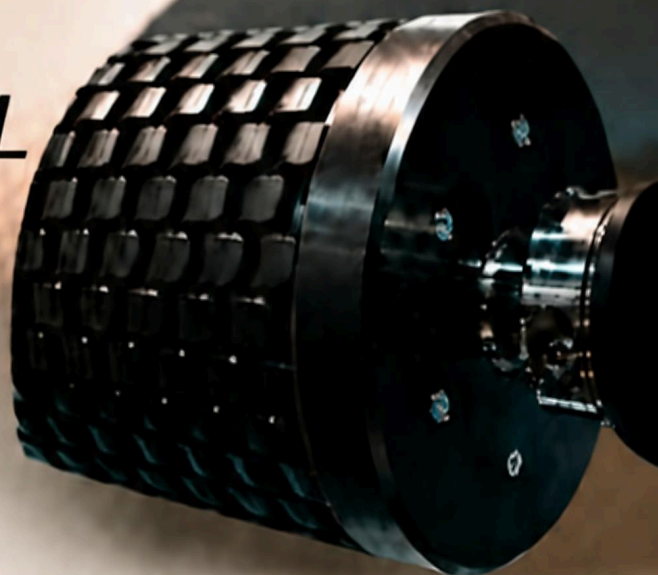

SPEED

Up to
1,000 m/min



WEB TENSION

.01 – 4 PLI



WRAP ANGLE

10° – 180°



DIAMETERS

60 – 150 mm



LENGTH

Custom lengths
up to 7,000 mm



LIGHTWEIGHT
ALUMINUM
CONSTRUCTION



UNIQUE DEAD-SHAFT
DESIGN



WEAR, TEMPERATURE &
OZONE RESISTANT



BUILT TO YOUR
SPECIFICATIONS



MADE WITH FDA CFR 21
COMPLIANT TPE RINGS



EFFECTIVE SPREADING

1,400 – 2,800 independently
operating elements per meter
of roll length



WIDE OPERATING RANGE

.01 – 4 PLI tension • 10° – 180° wrap angle
Up to 1,000 m/min



MULTIPLE SIZES

Diameters: 60, 110, 130, 150 mm
Custom lengths up to 7,000 mm



BUILT TO ORDER

Custom-built to your specifications
and delivered ready for installation



Most common materials made with the EcoStretchroll:

Film, foil, battery, non-wovens, paper, textiles,
flexible packaging.



Most common locations within processing lines to use an EcoStretchroll:

Unwinds, rewinds, turning bar systems, prior to
corona treatment, prior to splicing, lamination,
bowed roller spreading assist, any where you want
to remove wrinkles.



Learn more at www.webtechteam.com

EcoStretchRoll



WRINKLE REMOVING ROLLER

Request for Quote Form

COMPLETE THE FORM BELOW AND SEND TO SALES@WEBTECHTEAM.COM TO RECEIVE A QUOTATION

CONTACT & PROJECT

Date	Project Reference	Customer Name
Contact	Email	Phone
Street	City, State, Zip	

APPLICATION & DIMENSIONS

Web width Min.		Body length (web + 200mm)	
Web width Max.		Threading Required?	
Max. Tension		Web material	
Max. Speed		Ambient Temp.	
Wrap Angle		Use of Chemicals or washdown?	
Overall length			

PREFERRED OD

☐ 60 mm

☐ 110 mm

☐ 130 mm

☐ 150 mm

NOTES & ROLL DIMENSIONS



Submit RFQ to sales@webtechteam.com
or contact your local EcoStretchRoll representative.

Webtech